

Titan

12.1" Rugged Monitor




-
- **12.1" Colour TFT Rugged LCD monitor**
 - **SVGA and XGA Resolution**
 - **RGB Interface**
 - **Optional Composite video interface**
 - **Fully sealed to IP65 as standard**
 - **Sealing to IP68 on application**
 - **Connector options**
 - **Resistive touch screen option**
 - **Front mounted ergonomic OSD controls**
-



Bluestone
Technology Ltd

Product Information

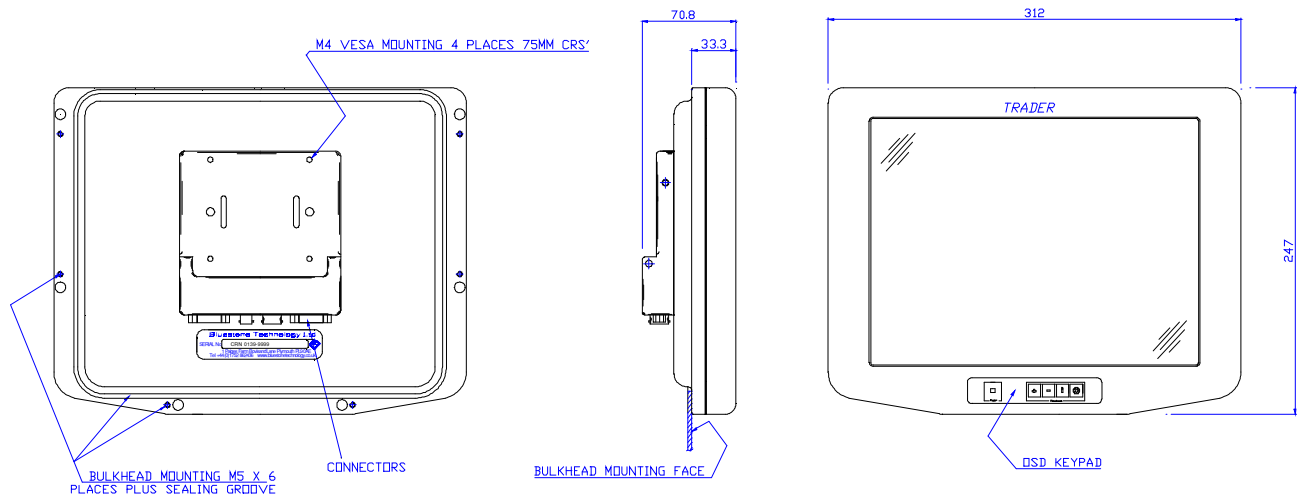

Description

The Titan 12.1" monitor is ideally suited to a wide range of applications where rugged reliability, readability over a wide ambient light range and sealing to IP 65 or greater is necessary. The optional high brightness display allows full sunlight readability making it ideal for many marine and mobile display applications such as marine chart plotting and instrumentation displays.. Various options are available to complement the monitors such as touch screens and custom rugged mounting brackets. A unique feature is the ability to mount the monitor into a panel or bulkhead if required using the integral rear mounting holes and panel seal supplied. Please contact us for more details of the options available.

Technical Specification

Display Size	12.1" Diagonal TFT	Brightness	350CD/M sq	Power Consumption	15W Typ
Resolution	SVGA 800 x 600 pixels XGA 1024 x 768 pixels	Passive Enhanced	400CD/M sq	Voltage	12V DC
No of Colours	262000	Contrast Ratio	350:1		
RGB Interface		Optional Composite Video Interface			
H Frequency	30-100KHz	Sealing	IP65 All round		
V Frequency	50/60Hz	Operating Temp	0 to +60 deg C		
		Storage Temp	-20 to + 60 deg C		

Bluestone Technology reserves the right to implement changes in design and technology which serve to improve the product. Specifications are subject to minimal alterations for production reasons.

1 Paiges Farm, Bovisand Lane, Down Thomas, Plymouth PL9 0AE

Tel / Fax +44 (0)1752 862436

E Mail sales @bluestonetechnology.com

Web Site www.bluestonetechnology.co.uk

Bluestone
Technology Ltd